

迷你高速球型摄像机

Mini Speed Dome Camera

AU-M2 series



产品描述 Description


AU-M2系列 4" 防砸多协议高速球型摄像机，球机机芯采用一体化集成设计，定位精确；外壳采用高强度铝合金压铸，透明球罩为PC材料，具备防破坏能力；内置高清晰度摄像机，多协议译码板，系统兼容性强。

AU-M2 series 4" Anti-smashing High Speed Dome Camera with multi-protocol and OSD are integrated in cassette mechanism and the orientation is accurate; the crust is made of high-strength aluminum die-casting, and the transparent cover is made by PC, and it is able to stand against destruction; built-in high-definition camera and multi-protocol decoder board, and the multi-protocol function is compatible.

关键特点 Features

- ▶ 4"光学防砸罩
- ▶ 水平360° 旋转, 速度达300° /秒
- ▶ 垂直100° 旋转, 速度达150° /秒
- ▶ 128个预置位
- ▶ 2条巡视轨迹
- ▶ 自动归位功能
- ▶ 长焦限速功能
- ▶ 视频 / 电源 / RS485 防雷保护
- ▶ 4" optical grade anti-smashing cover
- ▶ 360° horizontal rotation at up to 300° /s
- ▶ 100° vertical rotation at up to 150° /s
- ▶ 128 preset positions
- ▶ Scanning has 2 group
- ▶ Auto back home
- ▶ Long-focus speed limit function
- ▶ Video / Power / RS485 lightning protection

简图 Dimension: (单位Units: mm)

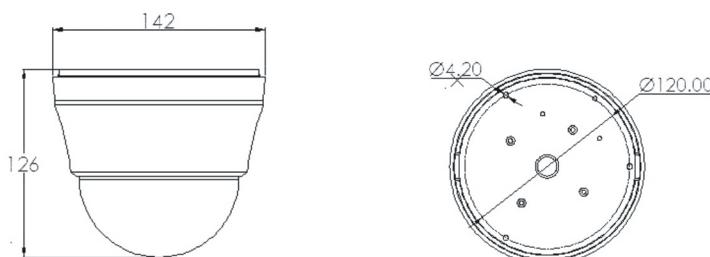

规 格 Specification

型号Model	AU-M2-WB10	AU-M2-WB12
光学倍率Optical zoom	10x Opt. / 12x digital	12x Opt. / 16x digital
有效像素Effective pixels	752(H) × 582(V)	752(H) × 582(V)
图像感应器Image sensor	1/4" CCD	1/4" CCD
视频输出Video output	1.0V[p-p] 75Ω	1.0V[p-p] 75Ω
水平分辨率Horizontal resolution	570TVL	540TVL
信噪比S/N ratio	>50dB	>50dB
最低照度Min. illumination	0.1 Lux	0.02LUX
光圈范围Iris range	f1.8 ~ 2.9	f1.6 ~ 2.7
聚焦控制Focus control	自动/手动 Auto/manual	自动/手动 Auto/manual
镜头Lens	f4.2 ~ 42mm	F 3.8~45.6mm
背光补偿Backlight compensation	开/关ON/OFF	开/关ON/OFF
白平衡White balance	自动Auto	自动Auto
控制方式Communication	RS485	
预置位Preset position	128	
预置点设置内容 Preset position setting	云台参数(上下/左右)和摄像机参数(倍数/焦距) PTZ parameters and camera parameters(zoom/focus length)	
巡视轨迹Cruising tracks	2	
水平范围Pan range	360° 旋转 360° endless	
水平速度Pan speed	0.5° ~ 300° /sec	
垂直范围Tilt range	0° ~ 100°	
垂直速度Tilt speed	0.5° ~ 150° /sec	
自动翻转Auto-flip	垂直90° 90° vertical	
视频保护Video protection	有Yes	
通讯口保护 Communication interface protection	有Yes	
电源保护Power protection	有Yes	
电源Power supply	DC12V	
工作温度Operation temperature	0° ~ +50°	
外形尺寸Dimension	Φ 142 × 126mm	
产品重量Weight	1.2Kg	